


MAXNET® II

Platinum Series

Passive Modules Broadcast/Narrowcast Combiners

Features

- Custom RF modules to combine narrowcast service groups together before each forward path transmitter
- One broadcast (BC) port and up to eight narrowcast (NC) ports to provide more options than you will ever need for assembling the full RF lineup
- Combine services that today's CCAP™ platforms do not support or too costly to support
- This device supports a pay-as-you-grow strategy that allows a future access point to add in any other RF content with no disruption or level changes to the existing plant
- Or use the BC input as a high isolation input for DOCSIS® 3.1 payload to maximize performance with higher order QAM modulation in OFDM channels

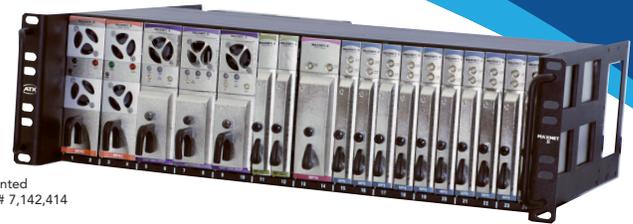

Patented
U.S.# 7,142,414

3RU Active Chassis
(front view)


D3.1/CCAP™
Compliant

1.2 GHz

- Up to 24 modules will fit into any 3RU MAXNET® II passive/active chassis (MP3B*), > 250% rack space savings over legacy solutions
- Front access -12 dB combiner test point. 20 dB transmitter test points do not provide high enough QAM levels to get an accurate MER reading
- Front access to plug-in locations for pads/EQs
- High performance MCX connectors



MPBCNC / MPBCNH

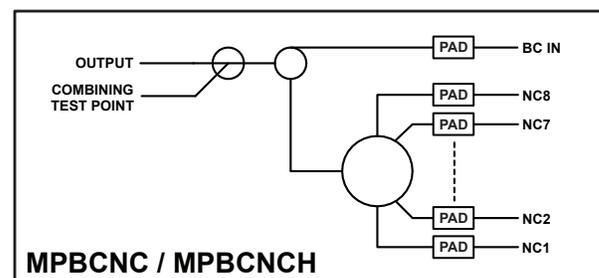

MPBCNC / MPBCNH

Functional Schematic

Specifications

Broadcast/Narrowcast Combiner (MPBCNC)

Broadcast/Narrowcast Combiner (MPBCNC)		MPBCNC
MEASUREMENT	FREQUENCY	QA (dB)
INSERTION LOSS BC PORT	5-550 MHz	5 +/- 0.5
	550-750 MHz	5 +/- 0.6
	750-860 MHz	5 +/- 0.8
	860-1002 MHz	5 +/- 1
INSERTION LOSS NC PORTS	5-550 MHz	16.5 +/- 0.5
	550-750 MHz	16.5 +/- 0.6
	750-860 MHz	16.5 +/- 0.8
	860-1002 MHz	16.5 +/- 1
TEST PORT LOSS	5-550 MHz	12 +/- 0.5
	550-750 MHz	12 +/- 0.6
	750-860 MHz	12 +/- 0.8
	860-1002 MHz	12 +/- 1
ISOLATION (Min) PORT-TO-PORT	5-1002 MHz	30
RETURN LOSS (Min)	5-1002 MHz	20
RFI (Min)	5-1002 MHz	100
OPERATING TEMPERATURE	0°C to +50°C (+32°F to +122°F)	
HUMIDITY	5-95% (without condensation)	
DIMENSIONS	4.9"H x 0.69"W x 9.4"D (12.45H x 1.75W x 23.88D cm)	
WEIGHT	1.85 lbs (0.84 kg)	

Ordering Information

Part Number	Description
MPBCNC	Broadcast/Narrowcast Combiner, 12 dB Front Test Port, 1 GHz
MPBCNCH	Broadcast/Narrowcast Combiner, 12 dB Front Test Port, 1.218 GHz

Specifications

Broadcast/Narrowcast Combiner (MPBCNCH)

Broadcast/Narrowcast Combiner (MPBCNCH)		MPBCNCH ⁽¹⁾		
MEASUREMENT	FREQUENCY	MIN (dB)	NOM (dB)	MAX (dB)
INSERTION LOSS (BC)	5 MHz		5.2	5.5
	50 MHz		5.2	5.5
	550 MHz		5.5	5.8
	870 MHz		5.7	6
	1002 MHz		5.8	6.1
	1218 MHz		5.9	6.2
INSERTION LOSS (NC)	5 MHz		16.7	17
	50 MHz		16.7	17
	550 MHz		17	17.3
	870 MHz		17.2	17.5
	1002 MHz		17.3	17.6
	1218 MHz		17.4	17.7
FLATNESS	50-1218 MHz		< 0.4	< 0.7
TEST PORT LOSS & FLATNESS ⁽²⁾	50-1218 MHz	11	12	13
ISOLATION (Min) NC PORT-NC PORT	50-1218 MHz	30	32	
ISOLATION (Min) NC PORT-BC PORT	50-1218 MHz	35	37	
RETURN LOSS (Min) ANY PORT	5-50 MHz	16	18	
	50-1002 MHz	20	22	
	1002-1218 MHz	18	20	
RFI (Min)	50-1218 MHz	100		
OPERATING TEMPERATURE	0°C to +50°C (+32°F to +122°F)			
HUMIDITY	5-95% (without condensation)			
DIMENSIONS	4.9"H x 0.69"W x 9.4"D (12.45H x 1.75W x 23.88D cm)			
WEIGHT	1.85 lbs (0.84 kg)			

NOTES:

- (1) Device to device isolation > 70 dB.
- (2) Test point is relative to the common.

Specifications

Broadcast/Narrowcast Combiner (MPBC4NC)

		MPBC4NC		
MEASUREMENT	FREQUENCY	MIN (dB)	TYP (dB)	MAX (dB)
INSERTION LOSS, BC IN	50 MHz	4.5	5	5.5
	1002 MHz	5	5.5	6
	Linear Deviation*		0.5	
INSERTION LOSS, NC IN	50 MHz	12.5	13	13.5
	1002 MHz	12	13	14
	Linear Deviation*		0.7	
RETURN LOSS	50-1002 MHz	18	20	
ISOLATION, NC-NC INPUT	50-1002 MHz	28	30	
ISOLATION, NC-BC INPUT	50-1002 MHz	35	38	
TAP LOSS, RELATIVE TO OUT	50-1002 MHz	-13	-12	-11
OPERATING TEMPERATURE	0°C to +50°C (+32°F to +122°F)			
HUMIDITY	5-95% (without condensation)			
DIMENSIONS	4.9"H x 0.69"W x 9.4"D (12.45H x 1.75W x 23.88D cm)			
WEIGHT	1.85 lbs (0.84 kg)			



NOTES:


* Max. deviation from a linear trend line drawn between typical loss at 50 MHz & 1002 MHz.

Device to device isolation > 75 dB.

Specifications

Broadcast/Narrowcast Combiner (MPBC4NCH)

		MPBC4NCH ⁽¹⁾		
MEASUREMENT	FREQUENCY	MIN (dB)	NOM (dB)	MAX (dB)
INSERTION LOSS SINGLE HI-ISO INPUT PORT (BC/H)	5 MHz		5.2	5.5
	50 MHz		5.2	5.5
	550 MHz		5.5	5.8
	870 MHz		5.7	6
	1002 MHz		5.8	6.1
	1218 MHz		5.9	6.2
INSERTION LOSS NORMAL INPUT PORTS (x4)	5 MHz		13.2	13.5
	50 MHz		13.2	13.5
	550 MHz		13.5	13.8
	870 MHz		13.7	14
	1002 MHz		13.8	14.1
	1218 MHz		14	14.3
FLATNESS	50-1218 MHz		< 0.4	< 0.8
TEST PORT LOSS & FLATNESS ⁽²⁾	50-1218 MHz	11	12	13
ISOLATION BETWEEN NORMAL PORTS	50-1218 MHz	30	32	
ISOLATION HI-ISO TO NORMAL PORTS	50-1218 MHz	34	37	
RETURN LOSS (Min) ANY PORT	5-50 MHz	16	18	
	50-1218 MHz	18	20	
RFI (Min)	5-1218 MHz	100		
OPERATING TEMPERATURE	0°C to +50°C (+32°F to +122°F)			
HUMIDITY	5-95% (without condensation)			
DIMENSIONS	4.9"H x 0.69"W x 9.4"D (12.45H x 1.75W x 23.88D cm)			
WEIGHT	1.85 lbs (0.84 kg)			

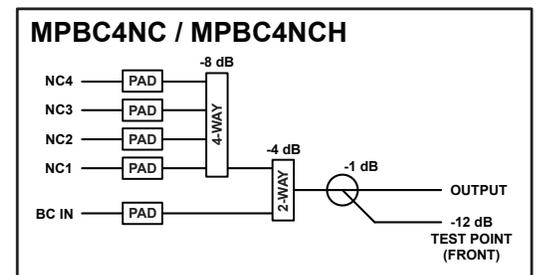

Functional Schematic

NOTES:

(1) Device to device isolation > 70 dB.

(2) Test point is relative to the common.

Specifications

Broadcast/Narrowcast Combiner (MPBC3NC-2H / MPBC2NC-2H)

MEASUREMENT	FREQUENCY	MPBC3NC-2H ⁽¹⁾			MPBC2NC-2H ⁽¹⁾		
		MIN (dB)	NOM (dB)	MAX (dB)	MIN (dB)	NOM (dB)	MAX (dB)
INSERTION LOSS SINGLE HI-ISO INPUT PORT (HI)	5 MHz		5	5.5		5	5.5
	50 MHz		5	5.5		5	5.5
	550 MHz		5.5	6		5.5	6
	870 MHz		5.9	6.4		5.9	6.4
	1002 MHz		6	6.5		6	6.5
	1218 MHz		6.2	6.7		6.2	6.7
INSERTION LOSS NORMAL INPUT PORTS	5 MHz		11.5	11.5		7.5	8
	50 MHz		11.5	11.5		7.6	8.1
	550 MHz		11.9	11.9		8.3	8.8
	870 MHz		12.1	12.2		8.8	9.3
	1002 MHz		12.2	12.8		9	9.5
	1218 MHz		12.3	13.3		9.3	9.8
FLATNESS	50-1218 MHz		< 0.4	< 0.8		< 0.4	< 0.7
TEST PORT LOSS & FLATNESS ⁽²⁾	50-1218 MHz	11	12	13	11	12	13
ISOLATION BETWEEN NORMAL PORTS	50-1218 MHz	28	32		28	30	
ISOLATION HI-ISO TO NORMAL PORTS	50-1218 MHz	32	35		32	35	
RETURN LOSS (Min) ANY PORT	5-50 MHz	16	18		16	18	
	50-1002 MHz	20	22		20	22	
	1002-1218 MHz	18	20		18	20	
RFI (Min)	5-1218 MHz	100			100		
OPERATING TEMPERATURE	0°C to +50°C (+32°F to +122°F)						
HUMIDITY	5-95% (without condensation)						
DIMENSIONS	4.9"H x 0.69"W x 9.4"D (12.45H x 1.75W x 23.88D cm)						
WEIGHT	1.85 lbs (0.84 kg)						

NOTES:



- (1) Specification with all unused ports terminated.
- (2) Test point is relative to the common.

Ordering Information

Part Number	Description
MPBC4NC	Broadcast/Narrowcast Combiner, 4 NC Inputs, MCX Connectors, 1 GHz
MPBC4NCH	Broadcast/Narrowcast Combiner, 4 NC Inputs, MCX Connectors, 1.218 GHz
MPBC3NC-2H	Dual Broadcast/Narrowcast Combiner, 3 NC Inputs, MCX Connectors, 1.218 GHz
MPBC2NC-2H	Dual Broadcast/Narrowcast Combiner, 2 NC Inputs, MCX Connectors, 1.218 GHz

MAXNET® II is a registered trademark of ATX in the United States and/or other countries. Products or features contained herein may be covered by one or more U.S. or foreign patents. Other non-ATX product and company names mentioned in this data sheet are the property of their respective companies.

© 2019 by ATX Networks Corp. and its affiliates (collectively "ATX Networks Corp."). All rights reserved. This material may not be published, broadcast, rewritten, or redistributed. Information in this document is subject to change without notice. Rev. 10/19 (ANW0806)

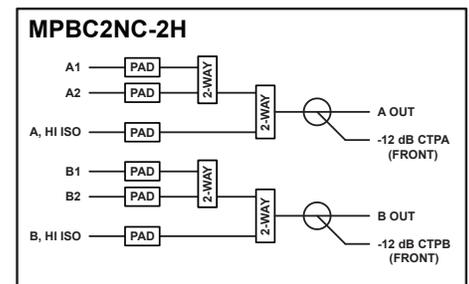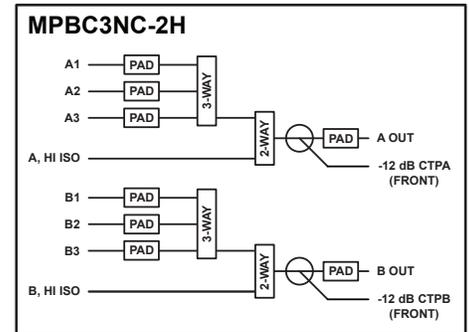

Functional Schematics



ATX Networks

Tel: 289.204.7800 | Toll-Free: 866.YOUR.ATX | support@atx.com