


Rack Mount Surge Protection

Specifications



RMO-9SPD shown

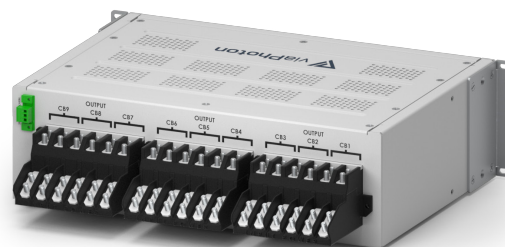


Front-facing fault indicators on SPDs and alarming capabilities

4U high x 19" rack mount enclosure. Designed for outside plant cabinets. Plug-in surge protect modules.

PART NUMBER	RMO-6SPD	RMO-9SPD
Capacity	supports 6 remote radio units	supports 9 remote radio units
Dimensions	4RU H x 19 inch W x 17 inch D	
Operating Temperature Range	-40°C to +80°C (OSP cabinet compatible)	
Surge Protector Alarming	included, internal SPD alarming and pass through from external devices	
Surge Protector Access	convenient front panel mount for visual indication and servicing	
Power Switch	isolated on/off switch per circuit	
Connection Interface (Input & Output)	dual lug	

PERFORMANCE SPECIFICATIONS

Protection Class	Class I / Type 1
Voltage Protection Rating	400 V (UL 1449)
Nominal Operating Voltage	48 VDC
Max Continuous Operating Voltage	100 VDC
Nominal Discharge Current	20kA
Max Surge Current	65kA
Response Time	≤25 nanoseconds



Scan
Me



©2023 viaPhoton, Inc. All rights reserved.